

GENERAL:

GDT Hub Drains are specialized drains made to provide drainage for equipment whose drainage outlets require an air gap before draining into the main wastewater system.


MATERIALS:

- 304 Stainless Steel
- 316 Stainless Steel
- SCH40
- SCH10

INSTALLATION:

The GDT Hub Drain shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A FOODSAFE HUB DRAIN

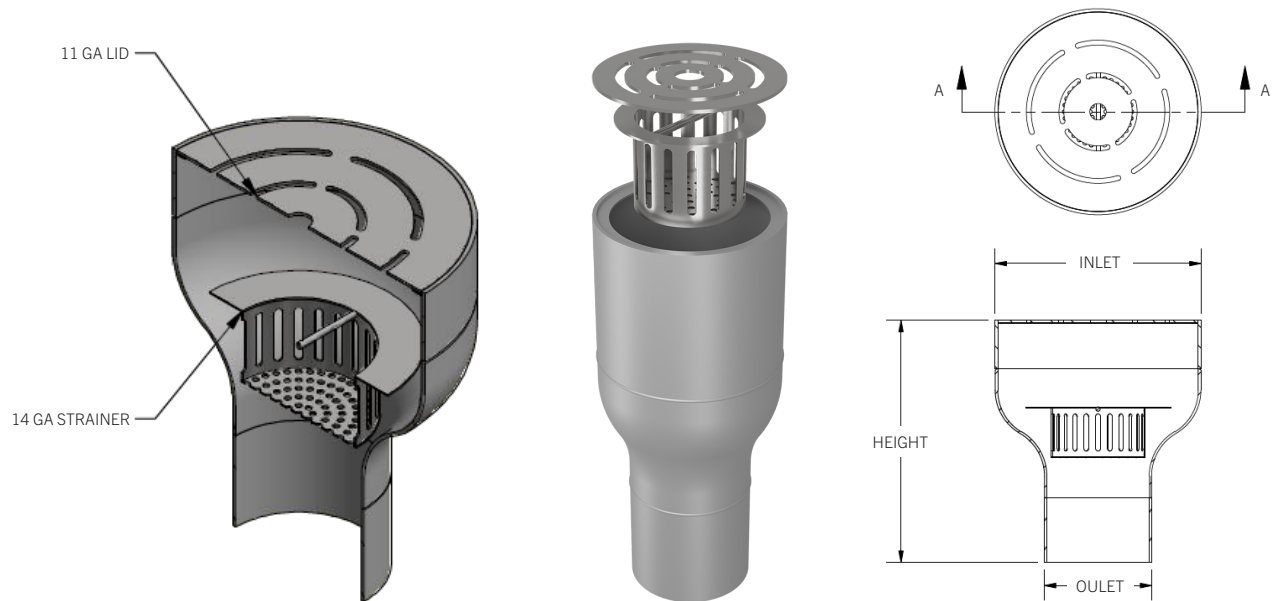

DESCRIPTION	PART NUMBER	INLET, NPS (mm)	OUTLET, NPS (mm)	HEIGHT (mm)
3x2 Hub Drain	FSHUB5010-32	76	51	191
4x3 Hub Drain	FSHUB5010-43	102	76	203
6x4 Hub Drain	FSHUB5010-64	152	102	381
8x4 Hub Drain	FSHUB5010-84	203	102	381
8 x 6 Hub Drain	FSHUB5010-86	203	152	381
12x6 Hub Drain	FSHUB5010-126	305	152	381
10x8 Hub Drain	FSHUB5010-108	254	203	356
12x8 Hub Drain	FSHUB5010-128	305	203	381
12x10 Hub Drain	FSHUB5010-1210	305	254	381
14x12 Hub Drain	FSHUB5010-1412	256	305	508
16x14 Hub Drain	FSHUB5010-1614	406	356	533

Specifying engineer is responsible for concrete encasement and reinforcing based upon application and local codes. Global Drain Technologies reserves the right to change the product and specifications without notice.