

GENERAL:

The surface drainage system shall be 1000V Series FoodSafe Slot Drain complete with slotted linear trench opening as manufactured by FoodSafe Drains.

MATERIALS

- T304 Stainless Steel
- T316 Stainless Steel

SLOPE: 0.5% Standard

DESIGN OPTIONS:

- Material(\$): SS 304(5), SS 316(6)
- Slot Opening(#): 25mm(1), 32mm (5)
- End(*): Open(0), End Cap(1), Flush Nipple(5)
- Section Lengths: Full 2946mm
- Custom Lengths Available

ACCESSORIES:



Cleaning Paddle, Cleaning Brush, Flush Flo, Clean In Place (CIP), Slot Hog, Tri-Clamp

INSTALLATION:

The 1000V Series FoodSafe Slot Drain shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL MODULAR LAYOUT OF A 1000V SERIES FOODSAFE SLOT DRAIN*

(Sections fit together as illustrated below)

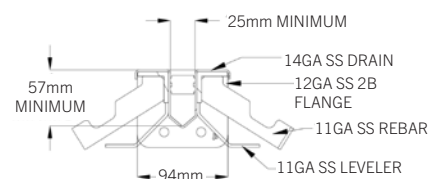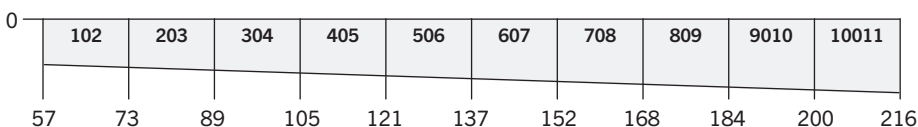

DRAIN CHANNELS DESCRIPTION	PART NUMBER	INVERT SHALLOW (mm)	INVERT DEEP (mm)
1000V SERIES SS SLOT 102	SD1\$*#V-102	57	73
1000V SERIES SS SLOT 203	SD1\$*#V-203	73	89
1000V SERIES SS SLOT 304	SD1\$*#V-304	89	105
1000V SERIES SS SLOT 405	SD1\$*#V-405	105	121
1000V SERIES SS SLOT 506	SD1\$*#V-506	121	137
1000V SERIES SS SLOT 607	SD1\$*#VS-607	137	152
1000V SERIES SS SLOT 708	SD1\$*#V-708	152	168
1000V SERIES SS SLOT 809	SD1\$*#V-809	168	184
1000V SERIES SS SLOT 9010	SD1\$*#V-9010	184	200
1000V SERIES SS SLOT 10011	SD1\$*#V-10011	200	216

CATCH BASIN DESCRIPTION	TOP DIAMETER (mm)	BOTTOM DIAMETER (mm)	HEIGHT (mm)	OUTLET SIZE (mm)
1000V SMALL	308	308	271	102 or 152
1000V LARGE	308	308	367	102 or 152