

GENERAL:

The surface drainage system shall be FoodSafe Square Top Area Drain, as manufactured by FoodSafe Drains.

MATERIALS:

- T304 Stainless Steel
- T316 Stainless Steel

FLOW RATE:

- 32 gpm

LOAD CLASS: E


ACCESSORIES & CLEANING TOOLS:

Tamper Proof Magnetic Strainer, Maglock, Maglock Key

INSTALLATION:

The FoodSafe Square Top Area Drain shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A FOODSAFE SQUARE TOP AREA DRAIN SYSTEM

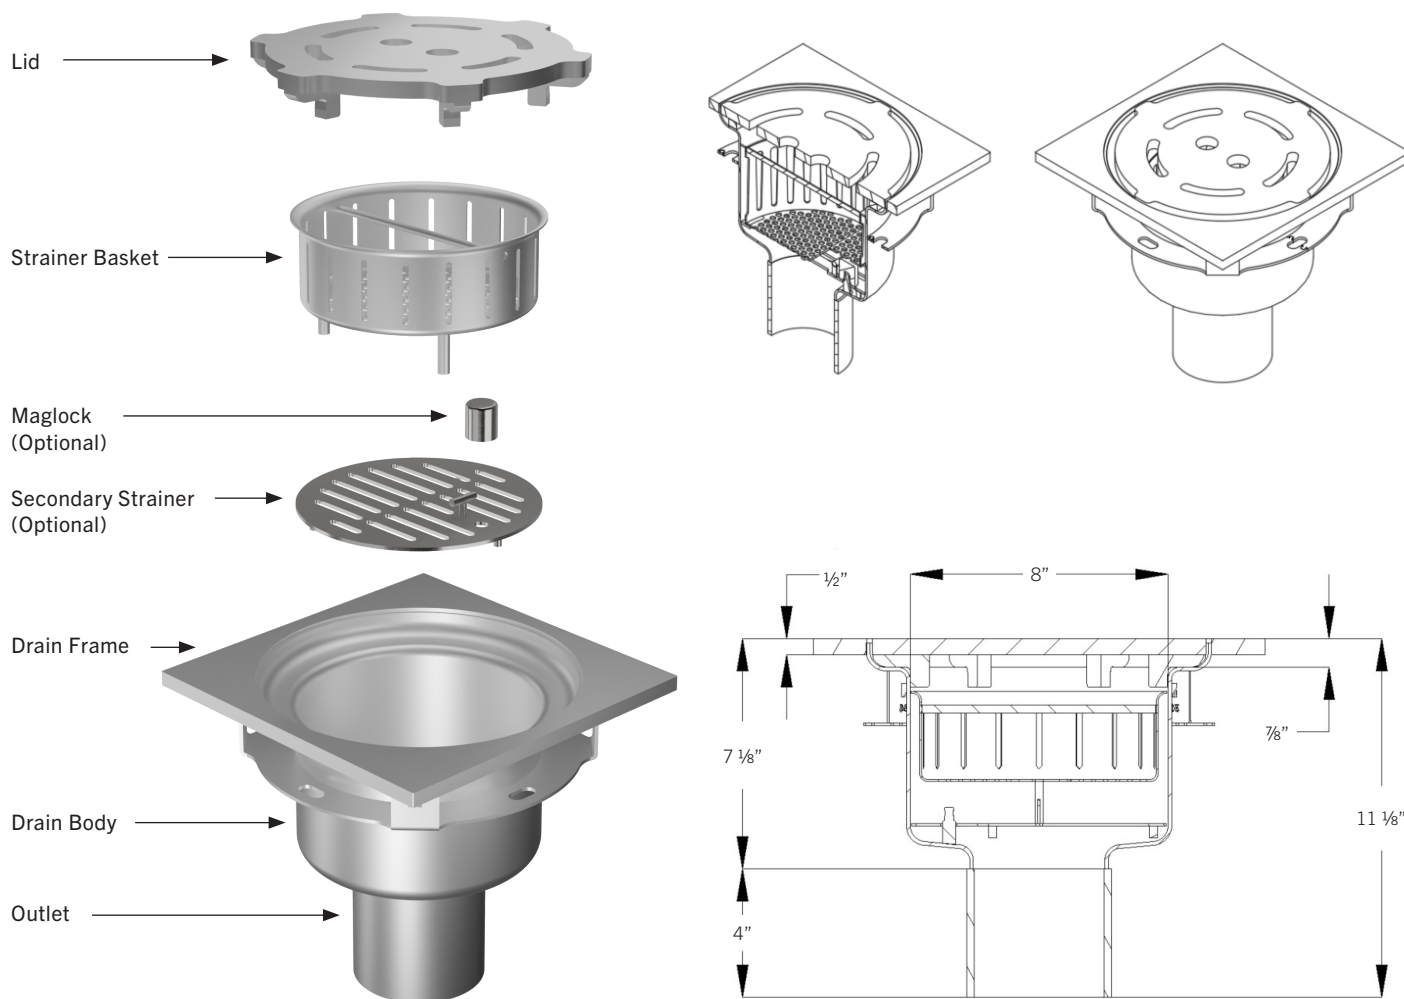

AREA DRAIN DESCRIPTION	DRAIN TOP ID (INCHES)	DRAIN OD (INCHES)	LID DIAMETER (INCHES)	LID HEIGHT (INCHES)	OUTLET DIAMETER (INCHES)	OUTER EDGE (INCHES)
AREA - SQUARE TOP	8	10 1/2	9 3/4	1/2	3 or 4	14

NOTE: Optionally, Maglock design also available

Specifying engineer is responsible for concrete encasement and reinforcing based upon application and local codes. FoodSafe Drains reserves the right to change the product and specifications without notice.