

GENERAL:

The Trench Grate is a stainless steel bar grating that can be used with FoodSafe Trench Drains as manufactured by FoodSafe Drains.

MATERIALS:

- T304 Stainless Steel
- T316 Stainless Steel

DESIGN OPTIONS:

- Material(\$): SS 304(5), SS 316(6)
- Grate Style(*): Anti-Skid Bar Grate(B), Bar Grate(B), Slotted Perforated Grate(U), Slotted Solid Grate(T)
- Bar Thickness(^): $\frac{3}{16}$ "(1), $\frac{1}{4}$ "(2), 11ga(4)
- Bar Grate Type(#): Plain(P), Serrated(S)
- Grate Height(%): 1 $\frac{3}{8}$ "(E), 2"(H), 1" (Bar and $\frac{1}{2}$ " Plate w $\frac{1}{2}$ " Spacer)(D)
- Grate Width(!): 6"(6), 8"(8)", 10"(10), 12"(12), 14"(14)
- Length: 28.94" (standard)
- Custom Lengths Available
- Custom Designs Available

LOAD CLASS:


- ASME A112.6.3 / CSA B79.3:22 - Special Duty
- DIN EN 1433 - Load Class-C, E

INSTALLATION:


The Trench Grate shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A TRENCH GRATE


SLOTTED PERFORATED GRATE




ANTI-SKID BAR GRATE

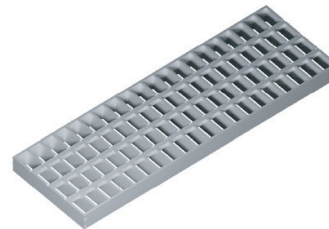

BAR GRATE



SLOTTED SOLID GRATE

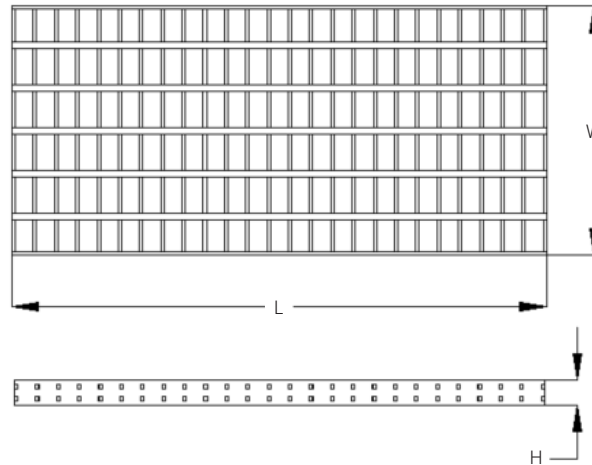

GRATE DESCRIPTION	PART NUMBER
SLOTTED PERFORATED GRATE	G\$U^P%I-28.94
ANTI-SKID BAR GRATE	G\$B^S%I-28.94
BAR GRATE	G\$B^P%I-28.94
SLOTTED SOLID GRATE	G\$T^P%I-28.94