

SPECIFICATIONS

GENERAL:

The Trench Grate is a stainless steel bar grating that can be used with FoodSafe Trench Drains as manufactured by FoodSafe Drains.

DESIGN OPTIONS:

Material (\$): SS 304(5), SS 316 (6)
 Grate Style (*): Bar (B), Slot Perf (P), Solid (S), Solid with Side Slot (T)
 Bar thickness (^): $\frac{3}{16}$ " (1), $\frac{1}{4}$ " (2), 11GA (4)
 Serration Type (#): Plain (P), Serrated (S)
 Grate Height (%): $1\frac{3}{8}$ " (E), 2" (H), 1" (Bar and $\frac{1}{2}$ " Plate w/ $\frac{1}{2}$ " Spacer) (D)
 Grate Width (!): 6"(6), 8"(8), 10"(10), 12"(12), 14"(14)
 Length: 29.9" (standard), Custom Lengths available. Custom Design available


LOAD CLASS:

$1\frac{3}{8}$ " Height Bar grate: ASME A112.6.3-2022/CSA B79.3:22 - Heavy Duty
 DIN EN 1433 - Load Class-C
 2" Height Bar grate:
 ASME A112.6.3-2022/CSA B79.3:22 - Special Duty
 DIN EN 1433 - Load Class-E

INSTALLATION:

The FoodSafe Trench Grate shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A FOODSAFE TRENCH GRATE

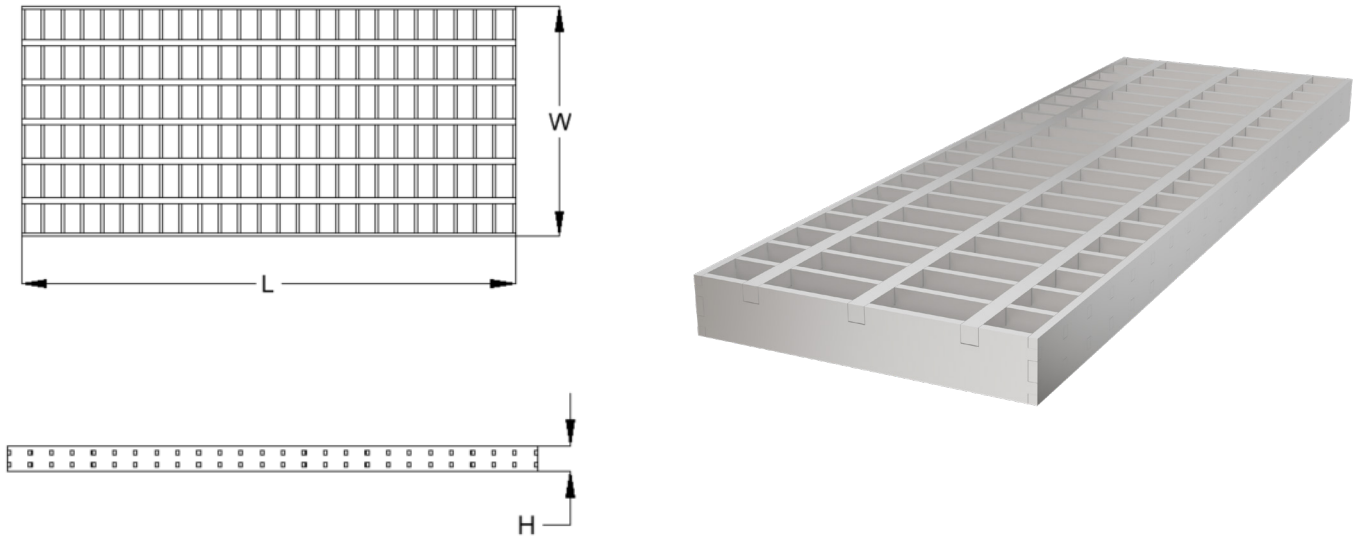

DESCRIPTION

FS GRATING BAR

PART NO.

G\$*^#!-29.9