

GENERAL:

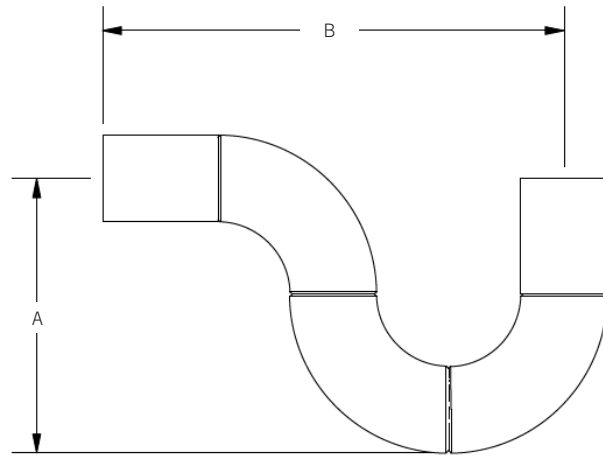
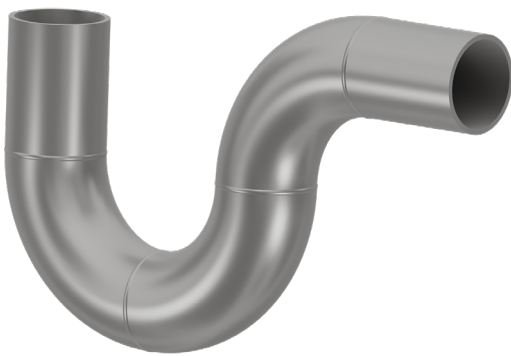
The GDT P-Trap is a stainless steel accessory that can be used in areas of drainage to prevent sewer gas from entering a facility. It is recommended to be used with all Catch Basins, Area Drains, Hub Drains, and Floor Sink bottom/vertical outlets manufactured by Global Drain Technologies.

MATERIALS

- T304 Stainless Steel
- T316 Stainless Steel

INSTALLATION:

The GDT P-Trap shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A GDT P-TRAP


DRAIN CHANNELS DESCRIPTION	PART NUMBER	PIPE SCHEDULE	A (mm)	B (mm)
P-TRAP WITH 76mm PIPE, SCHEDULE 10	PTRAP-53A	10	273	495
P-TRAP WITH 76mm PIPE, SCHEDULE 40	PTRAP-53	40	273	495
P-TRAP WITH 102mm PIPE, SCHEDULE 10	PTRAP-54A	10	362	610
P-TRAP WITH 102mm PIPE, SCHEDULE 40	PTRAP-54	40	362	610
P-TRAP WITH 152mm PIPE, SCHEDULE 10	PTRAP-56A	10	541	838
P-TRAP WITH 152mm PIPE, SCHEDULE 40	PTRAP-56	40	541	838
P-TRAP WITH 203mm PIPE, SCHEDULE 10	PTRAP-58A	10	719	1067
P-TRAP WITH 203mm PIPE, SCHEDULE 40	PTRAP-58	40	719	1067
P-TRAP WITH 254mm PIPE, SCHEDULE 10	PTRAP-510A	10	898	1295
P-TRAP WITH 254mm PIPE, SCHEDULE 40	PTRAP-510	40	898	1295
P-TRAP WITH 584mm PIPE, SCHEDULE 10	PTRAP-512A	10	1076	1524
P-TRAP WITH 584mm PIPE, SCHEDULE 40	PTRAP-512	40	1076	1524