

GENERAL:

The surface drainage system shall be 6000P Series Catch Basin, as manufactured by Global Drain Technologies.

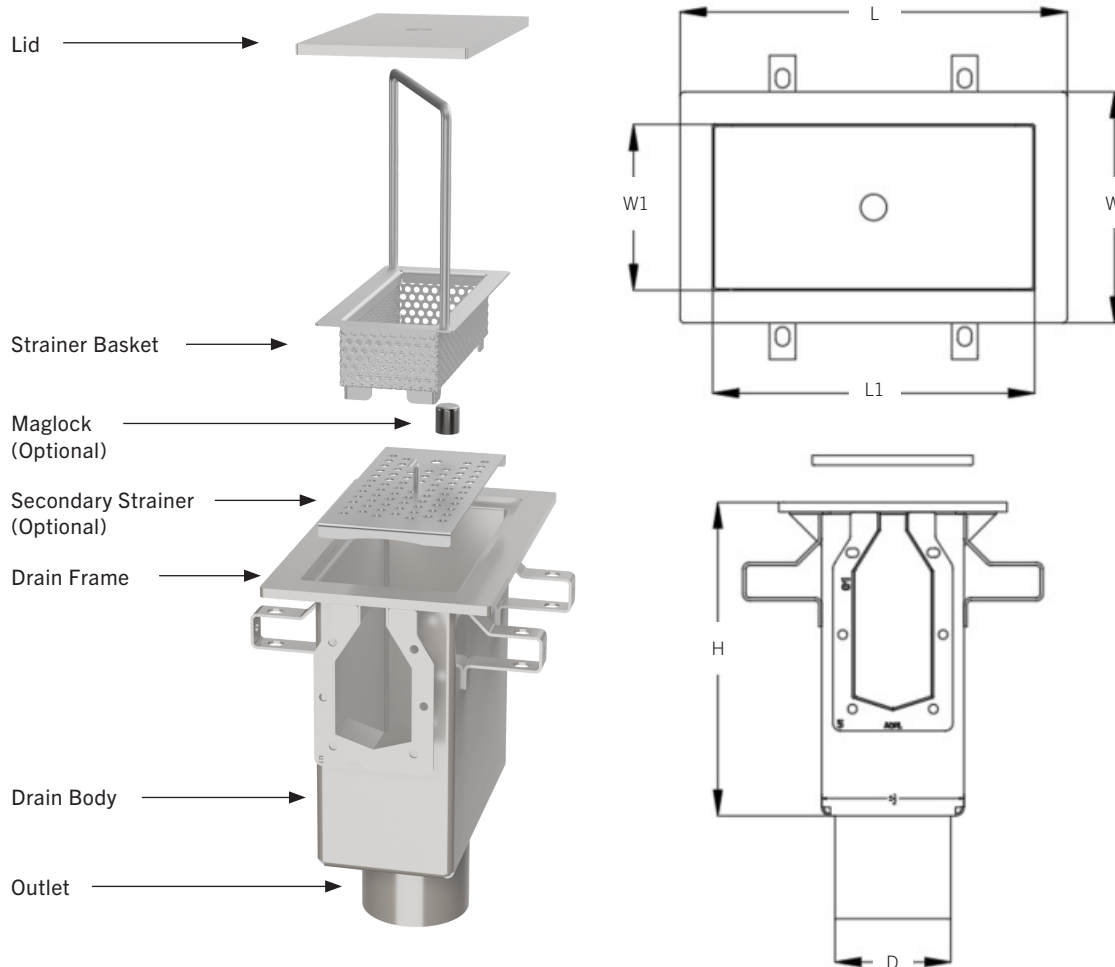
MATERIALS:

- T304 Stainless Steel
- T316 Stainless Steel

LOAD CLASS: E

INSTALLATION:

The 6000P Series Catch Basin shall be installed in accordance with the manufacturer's installation instructions and recommendations.

TYPICAL PROFILE OF A 6000P SERIES CATCH BASIN


	TOP WIDTH (INCHES)	TOP LENGTH (INCHES)	BOTTOM WIDTH (INCHES)	BOTTOM LENGTH (INCHES)	HEIGHT (INCHES)	OUTLET SIZE (INCHES)
6000P SS SMALL 6 X 12	12 ³ / ₈	6 ³ / ₈	5 ½	11 ½	12 ³ / ₁₆	4
6000P SS LARGE 6 X 12	12 ³ / ₈	6 ³ / ₈	5 ½	11 ½	16 ³ / ₁₆	4
6000P SS SMALL 12 X 12	12 ³ / ₈	12 ³ / ₈	11 ½	11 ½	12 ³ / ₁₆	4 or 6
6000P SS LARGE 12 X 12	12 ³ / ₈	12 ³ / ₈	11 ½	11 ½	16 ³ / ₁₆	4 or 6

NOTE: Available in 3 different design options according to the drain length. Flange - 5 catch basin - up to 4 drain sections (⁵/₁₂ x 12 x 12 ³/₁₆), Flange - 8 catch basin - up to 7 drain sections (⁵/₁₂ x 12 x 12 ³/₁₆), Flange - 11 catch basin - up to 10 drain sections (⁵/₁₂ x 12 x 16 ³/₁₆). Custom sizes are available as required. Solid Lid with a holes is our standard design, also custom lids available as required. SCH40 pipes are standard design, also SCH10 available as required. Optionally available end, side outlets. End or middle catch basin is our standard. Also available in "TEE" or cross connection catch basin. Available in Maglock/non Maglock design options.

Specifying engineer is responsible for concrete encasement and reinforcing based upon application and local codes. Global Drain Technologies reserves the right to change the product and specifications without notice.